

TAZ rigid conduits

Item codes : from 387850 to 387856 and from 387950 to 387956

SUMMARY

PAGES


- 1. Description and applications 1
- 2. Dimensions and compatibility 1
- 3. Technical features 1
- 4. Environmental profile 2
- 5. Conformity and approvals 2

1. DESCRIPTION AND APPLICATIONS

Galvanized steel rigid conduit (electrical welded with zinc deposited on welding). Suitable static applications where are required very high mechanical and thermal performances. It has a good resistance to chemicals and corrosion and guarantee an IP68 protection when used with TILOK connectors. It's the ideal solution for energy, signal or power distribution in industrial, commercial, infrastructures and residential applications.

2. DIMENSIONS AND COMPATIBILITY

Dimensions and packaging:




Item L=3 m	External diameter [mm]	S [mm]	L per piece [m]	Length toll. [mm]	Pack [m]
387850	16	1,0	3	-0 / +5	30
387851	20	1,0	3	-0 / +5	30
387852	25	1,0	3	-0 / +5	15
387853	32	1,2	3	-0 / +5	15
387854	40	1,2	3	-0 / +5	3
387855	50	1,2	3	-0 / +5	3
387856	63	1,5	3	-0 / +5	3

Item L=4 m	External diameter [mm]	S [mm]	L per piece [m]	Length toll. [mm]	Pack [m]
387950	16	1,0	4	-0 / +50	40
387951	20	1,0	4	-0 / +50	40
387952	25	1,0	4	-0 / +50	20
387953	32	1,2	4	-0 / +50	20
387954	40	1,2	4	-0 / +50	4
387955	50	1,2	4	-0 / +50	4
387956	63	1,5	4	-0 / +50	4

Compatibility:

Connectors, fittings and accessories TILOK series, SILOK series, MECHANICAL series, metal accessories and equipments.

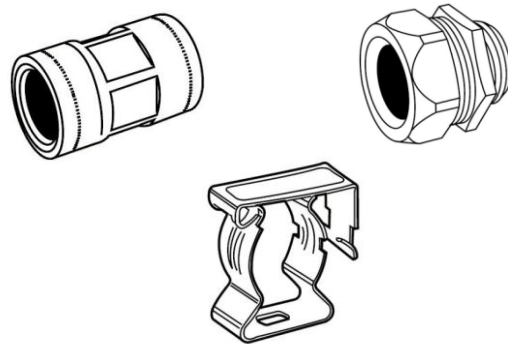

3. TECHNICAL FEATURES

Raw material:

Galvanized SENDZIMIR steel (according to EURONORM 142/95 and 147/91).

IEC 61386 classification:



1 st figure	2 nd figure	3 rd figure	4 th figure
Resistance to compression	Resistance to shock	Maximum installation and normal use temperature	Minimum transport, installation and normal use temperature
1 = very slight 125 N 2 = slight 320 N 3 = medium 750 N 4 = strong 1250 N 5 = very strong 4000 N	1 = very slight 0.5 J 2 = slight 1 J 3 = medium 2 J 4 = strong 6 J 5 = very strong 20 J	1 = +5 °C 2 = -5 °C 3 = -15 °C 4 = -25 °C 5 = -45 °C	1 = +60 °C 2 = +90 °C 3 = +105 °C 4 = +120 °C 5 = +150 °C 6 = +250 °C 7 = +400 °C

Resistance to chemical agents:

Represents the resistance to chemicals or external agents. The used test method consist of: immersion of the items under test in the chemical substance for 24 hours; once they were dried and conditioned at a constant temperature for other 24 hours, they were checked with the following examinations:

- Visual inspection to check the integrity
- Mechanical bending test
- Mechanical compression test
- IP protection test

Industrial chemical agents	Resistance*
Unleaded petrol	●
Industrial detergent	●
Diesel fuel	●
Lubricant oil	●
Emulsifier solution	●
Washing solvent	●

* resistances to chemicals are indicative. For any specific application or environment please contact Legrand technical offices

- Good resistance
- Medium resistance
- No resistance

Operating temperature:

Minimum: -25° C / -13° F

Maximum: +150° C / +302° F


Electric properties:





Electric continuity guaranteed

IP protection index:

IP68 with TILOK series connectors.

IP65 with MECHANICAL series connectors.

1 st digit IP	
Protection against the ingress of solid bodies	
0	No protection
 1	Protection against solid bodies larger than 50 mm (e.g.: accidental contact)
 2	Protection against solid bodies larger than 12 mm (e.g.: finger)
 3	Protection against solid bodies larger than 2.5 mm
 4	Protection against solid bodies larger than 1 mm
 5	Protection against dust
 6	Complete protection against dust

2 nd digit IP	
Protection against the ingress of liquids	
 2	Protection against drops of water falling at up to 15° from the vertical
 3	Protection against drops of rain water at up to 60° from the vertical
 4	Protection against sprays of water from all directions
 5	Protection against jets of water from all directions
 6	Protection against jets of water of similar force to heavy seas
 7	Protection against the effects of immersion
 8	Protection against prolonged effects of immersion under pressure

4. ENVIRONMENTAL PROFILE

All the items identified in this technical sheet respect in terms of concentration of substances and raw materials the European legislations about dangerous and forbidden substances and chemical preparations.

5. CONFORMITY AND APPROVALS



All the items identified in this technical sheet are compliant to all the requirements and the regulations currently in force in the European Union about safety, health and environmental issues.



IMQ mark: items from 387850 to 387856, 387499 and from 387950 to 387956.



RINA mark: items from 387850 to 387856, 387499 and from 387950 to 387956.

For technical documentation, test reports, commercial information or any other needs please refer to the local LEGRAND office.