



modello:  
model:

**PEVERA SYSTEM**

codice:  
code:

**1568**

design:

**Mati**

anno - year:

**2017**

tipologia:

**lampada da sospensione**  
suspension lamp

tipology:

materiali:

**legno di faggio, alluminio**  
beech wood, aluminium

materials:

luce:

**diretta**

light:

**direct**

sorgente luminosa:

**/W LED 6W 1073lm 4000K**

light sources:

**/WW LED 6W 1011lm 3000K**

**/XW LED 6W 970lm 2700K**

grado IP - IP grade:

**20**

peso netto - net weight:

**0,50 Kg**

finiture - finishes:

**.01 bianco**

**.01 white**

**.02 nero**

**.02 black**

**.05 rosso**

**.05 red**

marcatore:

**CE**


marking:

simboli costruttivi:



symbols:

#### Dimensioni - Dimensions

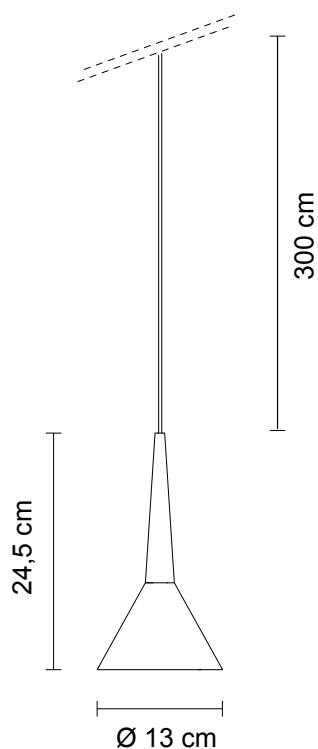


EGOLUCE s.r.l., via I.Newton 12 - 20016 Pero - Milano  
telefono +39 02 339586.1 - fax. +39 02 3535112  
e-mail: info@egoluce.com - http://www.egoluce.com

Codice  
Articolo

Colore

**0967**IN: 50/60Hz 220-240V  
OUT: 350mADCØ 9,3 cm  
H 3 cm**01****02**Rosone per sospensione con driver integrato senza cavo - 1 lampada  
Ceiling rose for suspension with switch without cable - 1 lamp**0968**

50/60Hz 220-240V

**02**Spina a parete con driver integrato + Jack - 1 lampada  
Plug in driver + Jack - 1 lamps**0969**

50/60Hz 220-240V

Ø 9,3 cm  
H 3 cm**01****02**Rosone senza interruttore con driver integrato - 1 lampada  
Canopy with driver (no switch) - 1 lamp**0969/S**

50/60Hz 220-240V

Ø 9,3 cm  
H 3 cm**01****02**Scatola con interruttore con driver integrato - 1 lampada  
Wall box with switch - 1 lamp**0970**

50/60Hz 220-240V

Ø 9 cm

**01****02**6x3,5x2 cm  
4,2 cmRosone per cartongesso con alimentatore - 1 lampada  
Plasterboard ceiling rose with converter - 1 lamp

7,5 cm

**0612**Elemento per decentramento  
Displacement component**01****02**Codice  
Articolo

Colore


**0535**IN: 50/60Hz 220-240V  
OUT: 350mA DC  
Ø 9,5 cm  
H 10 cm**01****02****05**Rosone per sospensione con driver integrato senza cavo - 1 lampada  
Ceiling rose for suspension with driver without cable - 1 lamp**0987**IN: 48V  
OUT: 350mADC**01****02**Adattatore per binario 48V - 1 lampada  
Adapter for 48V track - 1 lamp**0988**IN: 50/60Hz 220-240V  
OUT: 350mADC**01****02**Su richiesta disponibile versione  
**DIMMERABILE CASAMBI**  
CASAMBI DIMMABLE version on requestAdattatore per binario 220-240V - 1 lampada  
Adapter for 220-240V track - 1 lampEGOLUCE s.r.l., via I. Newton 12 - 20016 Pero - Milano  
telefono +39 02 339586.1 - fax. +39 02 3535112  
e-mail: info@egoluce.com - http://www.egoluce.com

## rosone e accessori - ceiling roses and accessories

3-3

Codice  
Articolo

**0556/3**  
IN: 50/60Hz 220-240V  
OUT: 350mA DC  
L 90 cm  
H 6,8 cm




01  
02  
05

Dimmerabile su richiesta  
*Dimmable on request*

NO Art. 1569 - 1592

F  Rosone completo di alimentatore - 3 lampade  
*Ceiling rose with converter - 3 lamps*  1,20

**0556/4**  
IN: 50/60Hz 220-240V  
OUT: 350mA DC  
L 120 cm  
H 6,8 cm




01  
02  
05

Dimmerabile su richiesta  
*Dimmable on request*

NO Art. 1569 - 1592

F  Rosone completo di alimentatore - 4 lampade  
*Ceiling rose with converter - 4 lamps*  1,40


**0556/6**  
IN: 50/60Hz 220-240V  
OUT: 350mA DC  
L 180 cm  
H 6,8 cm




01  
02  
05

Dimmerabile su richiesta  
*Dimmable on request*

NO Art. 1569 - 1592

F  Rosone completo di alimentatore - 6 lampade  
*Ceiling rose with converter - 6 lamps*  1,60

**0557/2**  
IN: 50/60Hz 220-240V  
OUT: 350mA DC  
Ø 20 cm  
H 3 cm




01  
02

Dimmerabile su richiesta  
*Dimmable on request*

F  Rosone completo di alimentatore - 2 Lampade  
*Ceiling rose with converter - 2 Lamps*  0,50



**0557/3**  
IN: 50/60Hz 220-240V  
OUT: 350mA DC  
Ø 40 cm  
H 4 cm



01  
02


Dimmerabile su richiesta  
*Dimmable on request*

NO Art. 1569 - 1592

F  Rosone completo di alimentatore - 3 Lampade  
*Ceiling rose with converter - 3 Lamps*  1,70

Codice  
Articolo

**0557/6**  
IN: 50/60Hz 220-240V  
OUT: 350mA DC  
Ø 38 cm  
H 4 cm




01  
02

Dimmerabile su richiesta  
*Dimmable on request*

NO Art. 1569 - 1592



F  Rosone completo di alimentatore - 4-6 Lampade  
*Ceiling rose with converter - 4-6 Lamps*  1,80

**0979/2**  
IN: 50/60Hz 220-240V  
OUT: 350mA DC  
48 x 24 cm  
H 3 cm




01  
02

Dimmerabile su richiesta  
*Dimmable on request*

F  Rosone completo di alimentatore - 2 Lampade  
*Ceiling rose with converter - 2 Lamps*  2,00

**0979/4**  
IN: 50/60Hz 220-240V  
OUT: 350mA DC  
48 x 48 cm  
H 3 cm




01  
02

Dimmerabile su richiesta  
*Dimmable on request*

NO Art. 1569 - 1592

F  Rosone completo di alimentatore - 4 Lampade  
*Ceiling rose with converter - 4 Lamps*  3,80


**0980/3**  
IN: 50/60Hz 220-240V  
OUT: 350mA DC  
Ø 35 cm  
H 3 cm




01  
02

Dimmerabile su richiesta  
*Dimmable on request*

NO Art. 1569 - 1592

F  Rosone completo di alimentatore - 3 lampade  
*Ceiling rose with converter - 3 lamps*  1,20

**0980/5**  
IN: 50/60Hz 220-240V  
OUT: 350mA DC  
Ø 45 cm  
H 3 cm



01  
02

Dimmerabile su richiesta  
*Dimmable on request*

NO Art. 1569 - 1592

F  Rosone completo di alimentatore - 5 Lampade  
*Ceiling rose with converter - 5 Lamps*  2,40

