



COLTELLI NH

Caratteristiche generali:


- Tipo prodotto: coltelli di neutro per basi NH;
- Dimensioni: NH-00, NH-0, NH-1, NH-2, NH-3, NH-4, NH-4a;
- Versioni: standard e con agganci isolati;
- Materiale: rame zincato;
- Conformi alle norme: CEI 32-1, CEI 32-4, IEC 60269-1, IEC 60269-2, DIN 43620;

NH SOLID LINKS

General characteristics:

- *Product type: neutral solid links for NH bases;*
- *Dimensions: NH-00, NH-0, NH-1, NH-2, NH-3, NH-4, NH-4a;*
- *Versions: standard and with insulated tags;*
- *Material: zinc plated copper;*
- *Conform to: CEI 32-1, CEI 32-4, IEC 60269-1, IEC 60269-2, DIN 43620;*

Foto dei prodotti / Products images

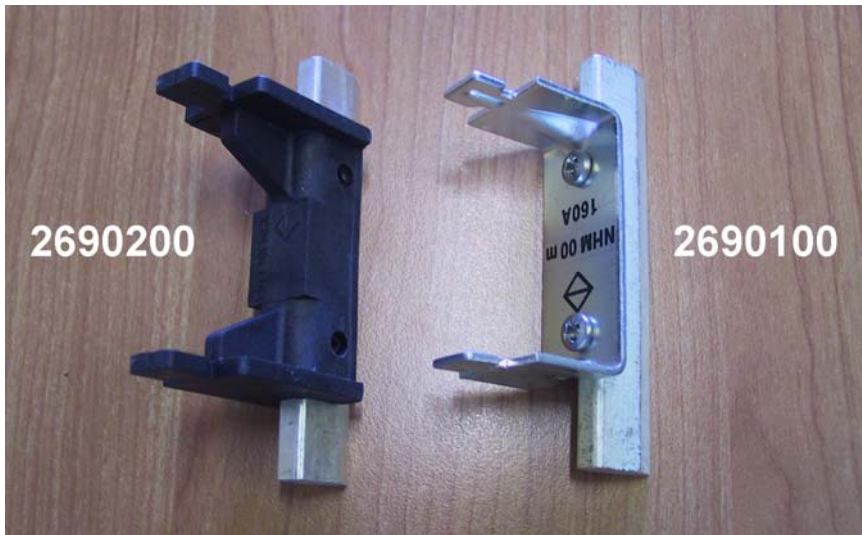

Pagine totali del documento: 3

Document total pages: 3

Ultimo aggiornamento: 20 ottobre 2015

Last updated: 20th October 2015



Codici e caratteristiche principali:

Codes and basic characteristics:

grandezza size	Codice code	Tipo type	Agganci tags	In (A)	Vn (V)	Conf pack
00	2690200	CSK00	isolati / <i>insulated</i>	160A	690V	3
	2690100	CS00	in metallo / <i>metal</i>	160A	690V	3
0	2690210	CSK0	isolati / <i>insulated</i>	160A	690V	3
	2690110	CS0	in metallo / <i>metal</i>	160A	690V	3
1	2690211	CSK1	isolati / <i>insulated</i>	250A	690V	3
	2690111	CS1	in metallo / <i>metal</i>	250A	690V	3
2	2690212	CSK2	isolati / <i>insulated</i>	400A	690V	3
	2690112	CS2	in metallo / <i>metal</i>	400A	690V	3
3	2690213	CSK3	isolati / <i>insulated</i>	630A	690V	3
	2690113	CS3	in metallo / <i>metal</i>	630A	690V	3
4	2690114	CS4	in metallo / <i>metal</i>	1250A	690V	3
4a	2690115	CS4a	in metallo / <i>metal</i>	1250A	690V	3




Disegno (modello con agganci isolati):

Dimensioni in mm

Drawing (type with insulated tags):

Dimensions in mm

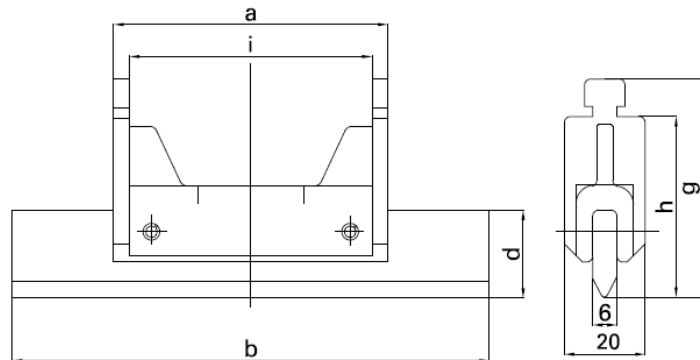

Tipo / Size	a	b	d	g	h	i
NH-00	49	78,5	15	44	35	43
NH-0	68	125	15	44	35	62
NH-1	68	135	20	49	40	62
NH-2	68	150	26	55	46	62
NH-3	68	150	36	65	56	62
NH-4	68	200	51	96	87	62
NH-4a *	89	200	50	95	86	83

* Le lame dei coltelli NH-4a sono forate, con interasse tra i centri dei fori pari a 150 mm

* The blades of the NH-4a knives have two holes, with a distance between them of 150 mm