


## PLDS22

Code	Nominal/lm	Real/lm	System/W	CCT*	Beam
<b>PLDS22</b>	1650	1579	15	3000K- <b>4000K</b> -5000K	110°



2 ANNI DI GARANZIA • YEARS OF GUARANTEE

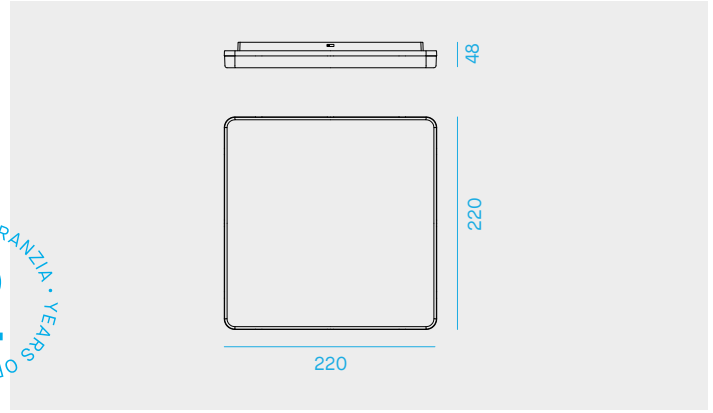

Plafoniera LED quadra IP20 per installazione a plafone e a parete.

LED 2835

Life time 30.000h (rendimento 70%).

Corpo in policarbonato bianco e diffusore opale.

Alimentatore 220-240V - 50/60Hz incluso.

IP20 square LED fitting for ceiling and wall-mounted installation

2835 LED.

Life time 30.000h (70% lumen maintenance).

White polycarbonate body, opal diffuser.

220-240V - 50/60Hz power supply included.

Plafonnier LED carré pour installation au plafond ou au mur en IP20

LED 2835

Durée de vie 30.000h (rendement 70%).

Corps en polycarbonate blanc, diffuseur opale.

Alimentation 220-240V - 50/60Hz incluse.


IP20 quadratische LED-Deckenleuchte für Decke- und Wandmontage.

2835 LED.

Lebensdauer 30.000h (Lichtstrom 70%).

Gehäuse aus weissem Polycarbonat, opaler Diffusor

Netzgerät 220-240V - 50/60Hz enthalten.

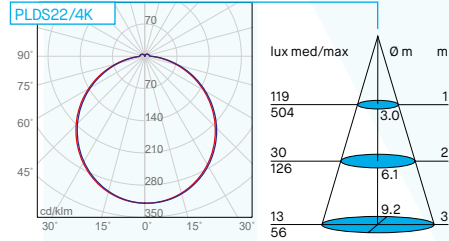

- \* Fotometrie eseguite con temperatura di colore 4000K
- \* Photometric tests at 4000K CCT
- \* Photométries réalisées avec une température de couleur de 4000K
- \* Photometrien durchgeführt mit Farbtemperatur 4000K

Selettore per cambiare la temperatura di colore: 3000K - 4000K - 5000K  
-  
Switch to change color temperature:  
3000K - 4000K - 5000K