


PLDS40

Code	Nominal/lm	Real/lm	System/W	CCT*	Beam
PLDS40	4200	3791	36	3000K- 4000K -5000K	110°



2 ANNI DI GARANZIA • YEARS OF GUARANTEE

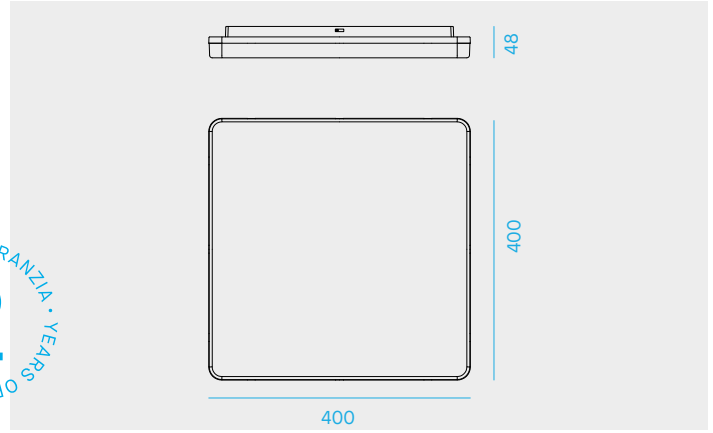

Plafoniera LED quadra IP20 per installazione a plafone e a parete.

IP20 square LED fitting for ceiling and wall-mounted installation

Plafonnier LED carré pour installation au plafond ou au mur en IP20

IP20 quadratische LED-Deckenleuchte für Decke- und Wandmontage.

LED 2835

2835 LED.

LED 2835

2835 LED.

Life time 30.000h (rendimento 70%).

Life time 30.000h (70% lumen maintenance).

Durée de vie 30.000h (rendement 70%).

Lebensdauer 30.000h (Lichtstrom 70%).

Corpo in policarbonato bianco e diffusore opale.

White polycarbonate body, opal diffuser.

Corps en polycarbonate blanc, diffuseur opale.


Gehäuse aus weissem Polycarbonat, opaler Diffusor

Alimentatore 220-240V - 50/60Hz incluso.

220-240V - 50/60Hz power supply included.

Alimentation 220-240V - 50/60Hz incluse.

Netzgerät 220-240V - 50/60Hz enthalten.

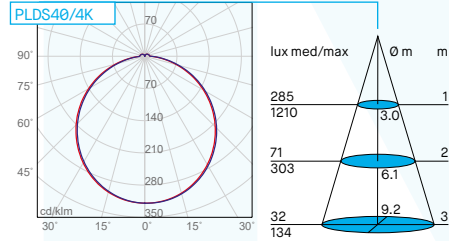

* Fotometrie eseguite con temperatura di colore 4000K

* Photometric tests at 4000K CCT

* Photométries réalisées avec une température de couleur de 4000K

* Photometriren durchgeführt mit Farbtemperatur 4000K

Selettore per cambiare la temperatura di colore: 3000K - 4000K - 5000K

Switch to change color temperature: 3000K - 4000K - 5000K