


Codice articolo Product code:	M05B2669
Descrizione Description:	Cavo R6UT4H23 C6 U/UTP AWG23 LSZH B2ca Cable R6UT4H23 C6 U/UTP AWG23 LSZH B2ca

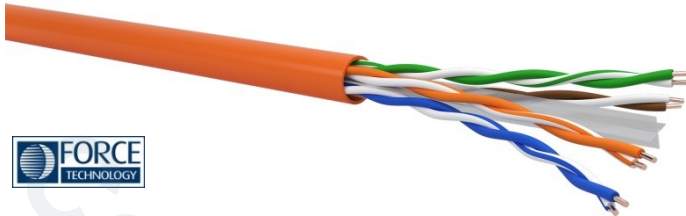

R6UT4H23 U/UTP LSZH B2ca

Cavo U/UTP di categoria 6 non schermato a 4 coppie (100 Ohm) con separatore a croce e nastro protettivo, guaina in LSZH (Low Smoke Zero Halogen) non propagante la fiamma e l'incendio, testato fino a 250 MHz. Idoneo per la realizzazione di canali trasmissivi in Classe E.

Applicazioni e performance

Cavo adatto alla realizzazione di sistemi di cablaggio generici in accordo con le normative EN 50173, ISO/IEC 11801.

Ideale per applicazioni per interno in classe E fino a 1GbE su protocollo IEEE 802.3ab e PoE/PoE+/PoE++. Le caratteristiche elettriche eccedono i requisiti di CAT.6.

Certificazioni ed omologazioni

Approvazione Force Technology per cavi di trasmissione dati di Categoria 6 secondo ISO/IEC 11801:2011, EN 50173-1:2011, ANSI/TIA-568-C.2.

Caratteristiche costruttive

Materiale/diametro conduttore	Rame rosso AWG 23/1 (0,55 mm)
Materiale/diametro isolamento	Polietilene solido diam. tip. 0,98 mm
Colore anime/cordatura	4 coppie: Bianco-Blu/Blu, Bianco-Arancio/Arancio, Bianco-Verde/Verde, Bianco-Marrone/Marrone
Rip cord	Cotone
Separatore	A croce in FRPE
Diametro cavo	6,6 mm
Materiale/colore guaina	LSZH/Arancio RAL 2003
Esente piombo	Si
Peso cavo	Circa 53 kg/Km
Marchatura	M05B2669 - QUBIX by CCS R6UT4H23 U/UTP LSZH 4P 23AWG 100 OHM CAT.6 ISO/IEC 11801 EN 50173 ANSI/TIA-568C.2 xxx/xx/xx (n° lotto/anno/mese) 000000 (marchatura metrica progressiva) m FID: xx - Euroclass B2ca-s1a,d1,a1 - DOP n° xxxx

Caratteristiche meccaniche e ambientali

Uso	Interno
Raggio di curvatura installazione	8 x diametro esterno
Raggio di curvatura funzionamento	4 x diametro esterno
Tiro massimo cavo	110 N (11kg max.)
Temperatura di installazione	da 0°C a +60°C
Temperatura di funzionamento	da -10°C a +60°C

R6UT4H23 U/UTP LSZH B2ca

U/UTP CAT6, unshielded 4-pair cable (100 Ohm) with cross separator and wrap tape, LSZH (Low Smoke Zero Halogen) flame and fire retardant jacket, tested up to 250 MHz. Suitable for the realization of transmission channels of Class E.

Applications and performance

Cable suitable for the realization of generic cabling systems according to EN 50173, ISO/IEC 11801.

Ideal for indoor applications in Class E up to 1GbE on IEEE 802.3ab protocol and PoE/PoE+/PoE++. Electrical characteristics exceed Category 6 requirements.

Certifications and approvals

Force Technology approval for data transmission cables of Category 6 according to ISO/IEC 11801:2011, EN 50173-1:2011, ANSI/TIA-568-C.2.

Construction characteristics

Conductor material/diameter	Solid bare copper AWG 23/1 (0,55 mm)
Insulation material/diameter	High density PE, avg. diam. 0,98 mm
Colour code/assembly	4 pairs: White-Blue/Blue, White-Orange/Orange, White-Green/Green, White-Brown/Brown
Rip cord	Cotton
Filler	FRPE cross type
Cable diameter	6,6 mm
Outer jacket material/color	LSZH/Orange RAL 2003
Lead free	Yes
Cable weight	About 53 Kg/Km
Printing	M05B2669 - QUBIX by CCS R6UT4H23 U/UTP LSZH 4P 23AWG 100 OHM CAT.6 ISO/IEC 11801 EN 50173 ANSI/TIA-568-C.2 xxx/xx/xx (n° of lot/year/month) 000000 (progressive metric marking) m FID: xx - Euroclass B2ca-s1a,d1,a1 - DOP n° xxxx

Mechanical and environmental properties

Uso	Indoor
Bend radius during installation	8 x outer diameter
Bend radius after installation	4 x outer diameter
Max pull strength	110 N (11kg max.)
Installation temperature	From 0°C to +60°C
Operating temperature	From -10°C to +60°C

Codice articolo Product code:	M05B2669
Descrizione Description:	Cavo R6UT4H23 C6 U/UTP AWG23 LSZH B2ca Cable R6UT4H23 C6 U/UTP AWG23 LSZH B2ca

Comportamento al fuoco

Regolamento CPR	EN 50575 Euroclasse B2ca s1a, d1, a1
Reazione al fuoco	EN 50399; IEC 60332-1-2; CEI 20-35/1-2
Emissione di gas acidi	IEC 60754-2; CEI 20-37/2-2
Densità fumi	IEC 61034-2; CEI 20-37/3-1

Fire behavior

CPR regulation	EN 50575 Euroclass B2ca s1a, d1, a1
Reaction to Fire	EN 50399; IEC 60332-1-2; CEI 20-35/1-2
Acid gas emission	IEC 60754-2; CEI 20-37/2-2
Smoke density	IEC 61034-2; CEI 20-37/3-1

Caratteristiche elettriche a 20°C

Resistenza conduttori (in loop)	max. 19 Ohm/100m
Sbilancio resistivo	max. 5%
Resistenza di isolamento	min. 5 GOhm x km
Sbilancio capacitivo	max. 1600 pF/km
Velocità nominale di propagazione NVP	68%
Ritardo di propagazione Delay skew	max. 570 ns/100m max. 45 ns/100m
Impedenza caratteristica	100 ± 15 Ohm
Rigidità dielettrica	1,7 kVAc per 2 sec

Electrical properties at 20°C

DC loop cond. resistance	max. 19 Ohm/100m
Resistance unbalance	max. 5%
Insulation resistance	min. 5 GOhm x km
Capacitance unbalance	max. 1600 pF/km
NVP nominal velocity of propagation	68%
Propagation delay Delay skew	max. 570 ns/100m max. 45 ns/100m
Characteristic impedance	100 ± 15 Ohm
Dielectric strength	1,7 kVAc for 2 sec

Applicazioni supportate

Tensione max. utilizzo

1000Base-T IEEE 802.3ab	-2/2 V
PoE IEEE 802.3af	44/57 V
PoE+ IEEE 802.3at	50/57 V
PoE++ IEEE802.3bt	52/57 V

Supported applications

Max. operating voltage

1000Base-T IEEE 802.3ab	-2/2 V
PoE IEEE 802.3af	44/57 V
PoE+ IEEE 802.3at	50/57 V
PoE++ IEEE802.3bt	52/57 V

ATTENZIONE: il cavo specificato è destinato ad essere utilizzato esclusivamente per la tecnologia della comunicazione per una tensione nominale massima di utilizzo di 72V; non è destinato e non deve essere né collegato né utilizzato per l'alimentazione elettrica di rete.

WARNING: the specified cable is intended to be used solely for communication technologies up to a maximum operating voltage of 72V; it is not intended for and must not be connected and/or used on the mains utility electricity supply.

PROPRIETA' TRASMISSIVE / TRANSMISSION PROPERTIES

Freq MHz	Attenuation dB/100m		NEXT dB		PS-NEXT dB		ACR dB@100m		PS-ACR dB@100m		ACR-F dB@100m		PS-ACR-F dB@100m		RL dB	
	max.*	Typ.	min.*	Typ.	min.*	Typ.	min.*	Typ.	min.*	Typ.	min.*	Typ.	min.*	Typ.	min.*	Typ.
1	2.1	1.8	66	90	64	87	64	88.3	62	85.3	66	86	64	77	-	26
10	6	5.7	59	68	57	73	53	74.8	51	67.8	50	68	47	61	25	32
31.25	10.7	10.4	52	68	50	66	41	62.6	39	56.6	40	60	37	51	23.6	33
62.5	15.5	14.8	47	67	45	61	32	53.5	30	47.5	34	54	31	46	21.5	31
100	19.9	19.0	44	62	42	57	24	47.9	22	39.9	30	48	27	41	20.1	30
155	25.3	24.3	41	59	39	54	16	40.4	14	32.4	26	45	23	37	18.8	28
200	29.1	27.6	40	56	38	53	11	35.3	9	28.3	24	41	21	35	18	27
250	33	30.9	38	53	36	52	5	29.4	3	24.4	22	36	19	30	17.3	26

*conforme a/according to EN 50288-6-1(2013)/IEC 61156-5(2012)

Confezionamento

Bobina	500 mt
--------	--------

Packaging

Drum	500 mt
------	--------