


Barra con profilo TT, 500 mm² (01223)

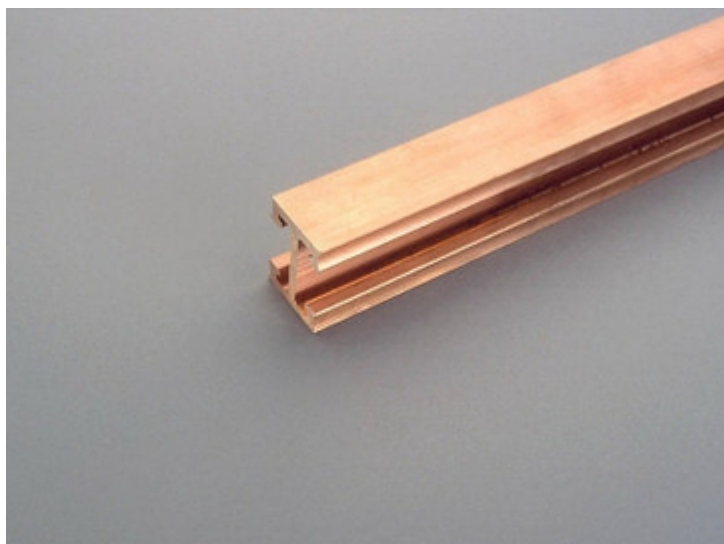

Descrizione

Articolo

Cod.art.: 01223

Barra con profilo TT, 500 mm²
lunghezza 3,60 m

Montaggio

60Classic

185mm-System
centre feed unit

Gruppo di prodotti 06

Sottogruppo merceologico 90

Pz / conf. 1

EAN 4021267012236

Catalog page 2018 : 3.3

eCl@ss 6.1 27370303
27370303
ETIM 4.0 EC001522
ETIM 5.0 EC001522

Certificazioni

Norme

IEC 61439-1:2011

Omologazioni

CSA , UL , Germanischer Lloyd



for UL feeder circuits >250V

Type No.: H500-L

UL file: E123577, UL category (for USA): NMTR <http://www.ul.com>

UL file: E123577, UL category (for Canada): NMTR7 <http://www.ul.com>

CSA file: 110285, CSA class: 3211-37 <http://directories.csa-international.org>

Omologazione CCC : no certification required

Dati prodotto

Valori elettrici

Power dissipation:

The power dissipation at a typical load of 80% of the rated current results to 131 W.

(The power dissipation for operation with rated current would be 204.7 W.)

short-circuit withstandability: see product description of the used busbar support

Valori meccanici


L x B x D: 3600 x 30 x 40

Peso: 1596 kg/100

Sezione: 500 mm²

Edge radius 0.5

Accessori



01252

Copertura barre

per barra con profilo TT o TTT, lungh. 1m
protezione contro contatti accidentali