


## Barra con profilo TT, 500 mm<sup>2</sup> (01250)

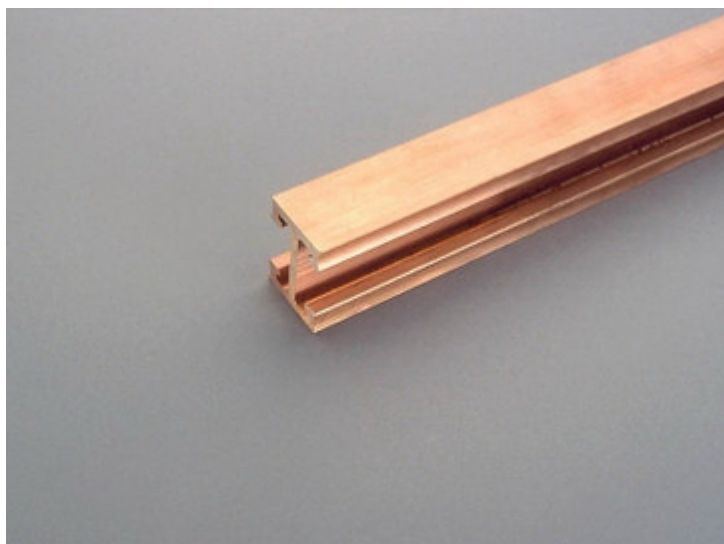

### Descrizione

#### Articolo

Cod.art.: 01250

Barra con profilo TT, 500 mm<sup>2</sup>  
lunghezza 2,40m

#### Montaggio

60Classic

185mm-System

centre feed unit

Gruppo di prodotti 06

Sottogruppo merceologico 90

Pz / conf. 1

EAN 4021267012502

Catalog page 2018 : 3.3

eCl@ss 6.1 27370303  
27370303  
ETIM 4.0 EC001522  
ETIM 5.0 EC001522

## Certificazioni

### Norme

IEC 61439-1:2011

### Omologazioni

CSA , UL , Germanischer Lloyd



for UL feeder circuits >250V

Type No.: H500-L

UL file: E123577, UL category (for USA): NMTR <http://www.ul.com>

UL file: E123577, UL category (for Canada): NMTR7 <http://www.ul.com>

CSA file: 110285, CSA class: 3211-37 <http://directories.csa-international.org>

Omologazione CCC : no certification required

## Dati prodotto

### Valori elettrici

Power dissipation:

The power dissipation at a typical load of 80% of the rated current results to 87.4 W.

(The power dissipation for operation with rated current would be 136.5 W.)

short-circuit withstandability: see product description of the used busbar support

### Valori meccanici

L x B x D: 2400 x 30 x 40

Peso: 1060 kg/100

Sezione: 500 mm<sup>2</sup>

Edge radius 0.5

## Accessori



**01252**

Copertura barre

per barra con profilo TT o TTT, lungh. 1m  
protezione contro contatti accidentali