


## Barra di rame, 40 x 10 (01626)

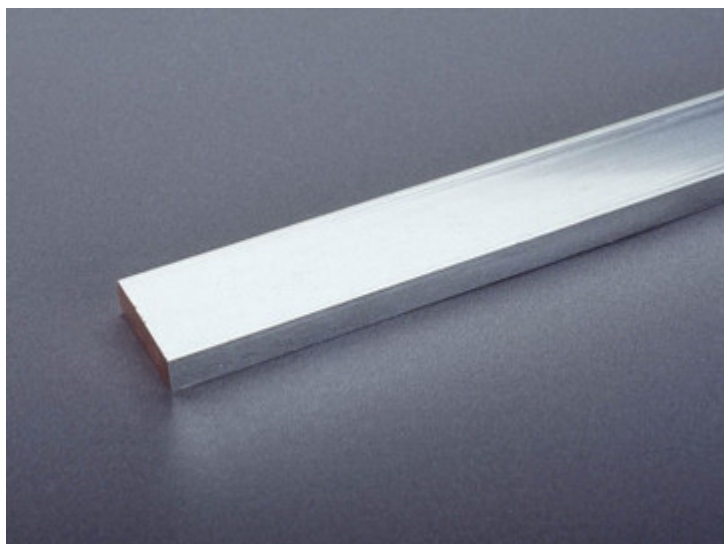

### Descrizione

#### Articolo

Cod.art.: 01626

Barra di rame, 40 x 10

lunghezza 2,40 m, stagnata

#### Montaggio

100Energy

185Power

185mm-System

Gruppo di prodotti 06

Sottogruppo merceologico 84

Pz / conf. 1

EAN 4021267016265

## Vantaggi prodotto

Tin-plated Cu busbars considerably reduce the effort of preparing the contact points.  
The Cu busbars are effectively protected against aggressive media.

Catalog page 2018 : 4.1

eCl@ss 6.1 27370303

27370303

ETIM 4.0 EC001522

ETIM 5.0 EC001522

## Certificazioni

### Norme

IEC 61439-1:2011

### Omologazioni

UL



for UL feeder circuits >250V

Type No.: 40x10-L

UL file: E123577, UL category (for USA): NMTR <http://www.ul.com>

UL file: E123577, UL category (for Canada): NMTR7 <http://www.ul.com>

Omologazione CCC : no certification required

## Dati prodotto

### Valori elettrici

Rated current (UL): 700 A

Rated voltage (UL) AC: 1000

V

Rated voltage (UL) DC: 1000

V

Power dissipation:

The power dissipation at a typical load of 80% of the rated current results to 54.8 W.

(The power dissipation for operation with rated current would be 85.6 W.)

short-circuit withstandability: see product description of the used busbar support

### **Valori meccanici**

L x B x D: 2400 x 40 x 10

Peso: 856.8 kg/100

Sezione: 400 mm<sup>2</sup>

Edge radius 0.5

### **Proprietà materiali**

Corpo base: Cu-ETP R300 (EN 13601), tinned

corrosion-resistant, also in aggressive environments