


Base di connessione dei componenti, 125 A (11405)

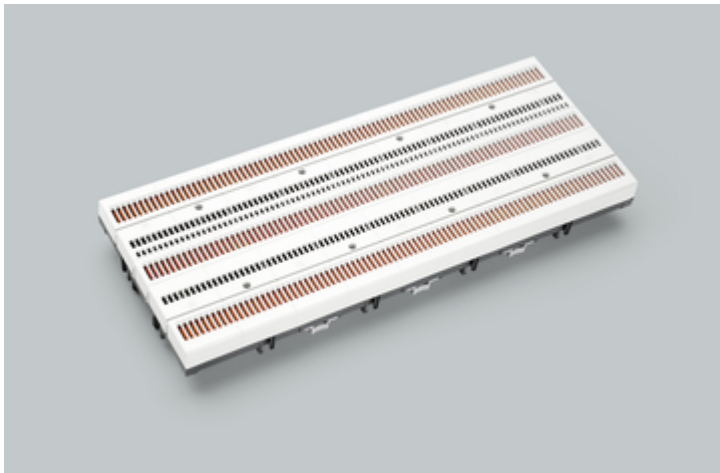

Descrizione

Articolo

Cod.art.: 11405

CrossBoard® 405

Base di connessione dei componenti, 125 A

3p

lunghezza 405 mm, protetta contro contatti accidentali

Montaggio

CrossBoard®

Gruppo di prodotti 06

Sottogruppo merceologico 50

Pz / conf. 1

EAN 4021267114053

Vantaggi prodotto

all-round touch-safe protected busbar system up to 125A
mounting to DIN rails with no tools
simple screwing-on to mounting plates
completely pre-assembled and ready to use

Catalog page 2018 : 1.1

eCl@ss 6.1 27400607
27400607

ETIM 4.0 EC001166

ETIM 5.0 EC001166

Certificazioni

Norme

IEC 61439-1:2011

Omologazioni

IEC (CB) , UL



for UL feeder circuits >250V

Type No.: CB405-24x7

UL file: E123577, UL category (for USA): NMTR <http://www.ul.com>

UL file: E123577, UL category (for Canada): NMTR7 <http://www.ul.com>

Omologazione CCC : no certification required

Dati prodotto

Valori elettrici

Corrente nominale (IEC): 125 A

Tensione nominale (IEC) AC: 690 V

Tensione nominale (IEC) DC: 600 V

Rated current (UL): 96 A
Rated voltage (UL) AC: 600
V
Rated voltage (UL) DC: 600
V

Tensione di picco Uimp: 6 kV

rated peak withstand current I_{pk} : 25 kA
Bemessungskurzzeitstromfestigkeit I_{CW} : 10 kA (300 ms)

SCCR: 10 kA
SCCR: 50kA@Class J 60A / 600VAC

Valori meccanici

L x H x P: 405 x 160 x 45.1
Peso: 137.2 kg/100
Poli: 3 poli

degree of protection: IP20

Avvisi e consigli

We recommend the use of a high DIN rail (35x15) for optimum stability and maximum burden.
For details please see the mounting instruction.

Tightening torque for screwing-on the CrossBoard®: 1,5 Nm (13lb-in)