


## Base sezion. per fus. cilind., montaggio su barre (31958)

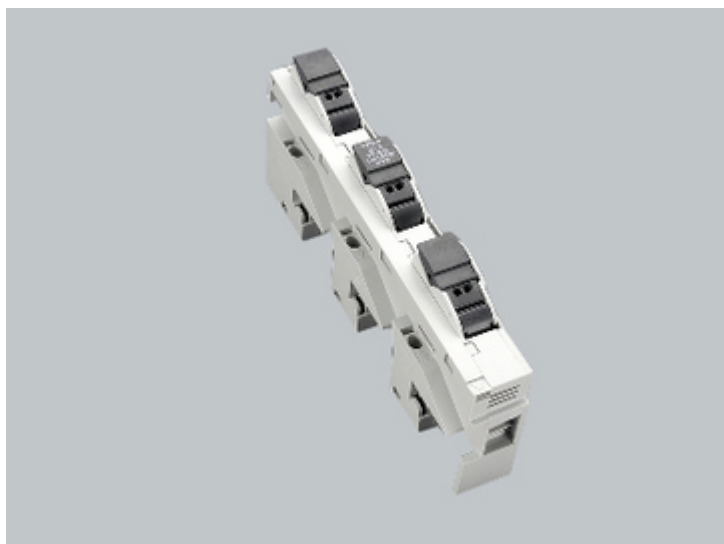

### Descrizione

#### Articolo

Cod.art.: 31958

AMBUS® 60Classic

Base sezion. per fus. cilind., montaggio su barre

per fusibili class CC sec. UL 248-4

class CC / 3P

per barre 12, 15, 20, 25, 30 x 5, 10 e barre profilate

#### Montaggio

60Classic

Gruppo di prodotti 01

Sottogruppo merceologico 47

Pz / conf. 4

EAN 4021267319588

Catalog page 2018 : 3.21

eCl@ss 6.1 27142121  
27142121  
ETIM 4.0 EC002705  
ETIM 5.0 EC002705

## Certificazioni

### Norme

UL 4248-1 Ed. 1  
UL 4248-4 Ed. 1

### Omologazioni

CSA, UL



for UL feeder circuits >250V

Type No.: AELCC

UL file: E230163, UL category (for USA): IZLT <http://www.ul.com>  
UL file: E230163, UL category (for Canada): IZLT7 <http://www.ul.com>  
CSA file: 110285, CSA class: 3211-37 <http://directories.csa-international.org>

## Dati prodotto

### Valori elettrici

Corrente nominale (IEC): 30 A  
Tensione nominale (IEC) AC: 600  
V

Rated voltage (UL) AC: 600  
V

Power dissipation:

The power dissipation at a typical load of 80% of the rated current results to 1.2 W.  
(The power dissipation for operation with rated current would be 1.8 W.)

rated isolation voltage  $U_j$ : 800  
V  
Tensione di picco  $U_{imp}$ : 6 kV  
Tensione max. IEC AC: 600  
V

cond. rated short-circuit current with fuses: 200 kA / 600 V AC/DC

for Class CC fuse links

### Valori meccanici

L x H x P: 27 x 200 x 104  
Peso: 18.6 kg/100  
Poli: 3 poli  
per barre: 12, 15, 20, 25, 30 x 5, 10 e barre profilate

Type of fastening: patented click mechanism

### Conessioni

nach IEC: Cu 1.5 ... 6 mm<sup>2</sup> (f, re)  
nach UL /CSA: AWG 16 ... AWG 10 (str)

### Proprietà materiali

Involucro: temperature stability 125°C,  
self-extinguishing in acc. to UL 94,  
creepage resistance CTI 600,  
halogen-free  
Portafusibile: temperature stability 125°C,  
self-extinguishing in acc. to UL 94,  
creepage resistance CTI 600,  
halogen-free  
Copertura: temperature stability 125°C,  
self-extinguishing in acc. to UL 94,  
creepage resistance CTI 600,  
halogen-free